



## Dual-Axis Accelerometer

### CAS200



Actual size

#### Key features

- Small (CAS200: 10.4 x 6.0 x 2.2mm, CAS290: 10.4 x 6.7x 2.7mm)
- Excellent bias repeatability over temperature
- Flat and orthogonal mounting options (CAS21x and CAS29x)
- Dual-axis MEMS accelerometer in a hermetically sealed ceramic LCC surface mount package for temperature and humidity resistance
- Five dynamic range options;  $\pm 0.85g$ ,  $\pm 2.5g$ ,  $\pm 10g$ ,  $\pm 30g$  and  $\pm 96g$
- Analogue outputs for linear acceleration, temperature and BIT
- Digital output via SPI® interface
- Wide bandwidth (typically 170Hz digital, 250Hz analogue)
- Temperature range -40 to +125°C
- High shock and vibration rejection
- Low power consumption (3mA typical) from a 3.3V supply
- Integral temperature sensor
- RoHS compliant

### CAS290 (Coming Soon)



Actual size

#### Typical applications

- Aerospace and industrial
- Aircraft AHRS and controls
- Platform stabilisation
- Drilling guidance
- Surveying and mapping
- Land and marine navigation
- Transportation
- Inertial measurement units




## Dual-Axis Accelerometer

For full technical datasheets please go to our website where the documents can be downloaded

### CAS20x


All dimensions in millimetres

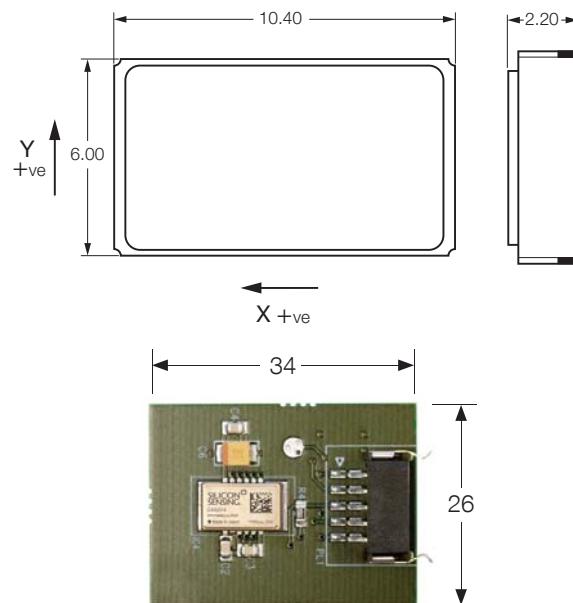

Gemini™ Evaluation Board -  
CAS200 (P/N CAS21x-02-0302)

### CAS29x (Coming Soon)

All dimensions in millimetres

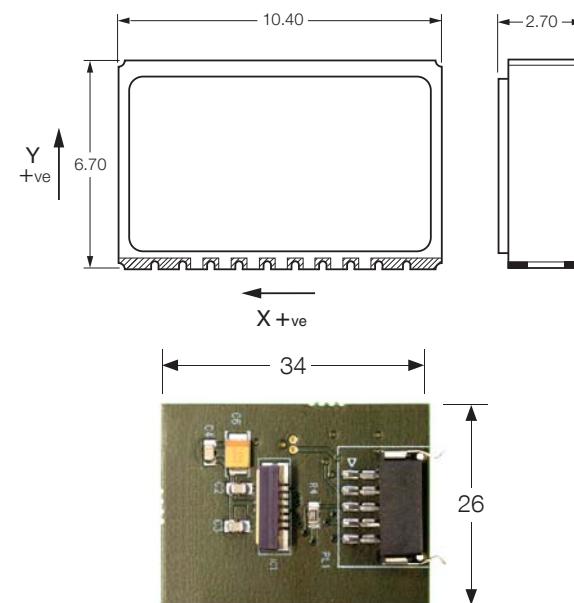

Gemini™ Evaluation Board -  
CAS290 (P/N CAS29x-02-0302)

Parameter	Specification				
	2-axis				
Ordering Part Number	CAS211	CAS212	CAS213	CAS214	CAS215
	CAS291	CAS292	CAS293	CAS294	CAS295
Dynamic range	±0.85g	±2.5g	±10g	±30g	±96g
SF over temperature	1.2% (Digital), 1.5% (Analogue)				
SF non-linearity	0.5%	0.5%	2.0%	2.0%	2.0%
Bias run to run @ +25°C	0.35mg	0.75mg	0.75mg	3.0mg	8.0mg
Noise spectral density	50µg/√Hz	150µg/√Hz	150µg/√Hz	350µg/√Hz	1,000µg/√Hz
Vibration rectification (20Hz to 2KHz)	0.15mg/g <sup>2</sup> @ 0.5gms	0.15mg/g <sup>2</sup> @ 2.0gms	0.15mg/g <sup>2</sup> @ 8.0gms	0.1mg/g <sup>2</sup> @ 12gms	0.1mg/g <sup>2</sup> @ 12gms
Supply voltage	2.7V ~ 3.6V				
Current consumption	3mA				
Bandwidth	> 170Hz (Digital), > 250Hz (Analogue)				
Temperature	Operating: -40°C to +125°C. Storage: -55°C to +150°C				
Shock	Operating: 1,000g 1ms ½ sine. Survival: > 6,500g				
Start-up time	20ms				
Mass	0.4 gram typical				

Silicon Sensing Systems Limited  
Clifford Road, Southway,  
Plymouth, Devon  
PL6 6DE United Kingdom

T +44 (0)1752 723330  
F +44 (0)1752 723331  
E sales@siliconsensing.com  
W siliconSENSING.com

Silicon Sensing Systems  
Japan Limited  
1-10 Fuso-Cho,  
Amagasaki,  
Hyogo 6600891, Japan

T +81 (0)6 6489 5868  
F +81 (0)6 6489 5919  
E sssi@spp.co.jp  
W siliconSENSING.com

Specification subject to change  
without notice.

© Copyright 2013  
Silicon Sensing Systems Limited  
All rights reserved. Printed in England 09/13

CAS200-00-0100-131 Rev 3  
DCR No. 710004103